

DESCRIPTION

Hazard Stripe Vinyl Tape. Soft PVC tape, suitably plasticized and stabilized. Coated with rubber-based pressure sensitive adhesive on one side. With shiny and colored stripes. Red and White Hazard Stripe. OSHA color coding. Custom slit to width

APPLICATION PROCESS

For industrial identification, color coding, lane marking and bundling. Flexible, abrasion resistant, conformable, wear resistant, easy to apply, versatile and moisture resistant. High visibility. Non-corrosive, pressure-sensitive adhesive eliminates the need of heat, moisture, or other catalysts to affect application.

MATERIAL DESCRIPTION

SIZE (width x length)	36 yd
COLOR	Red and White
ADHESIVE TYPE	Pressure-Sensitive Tape
CONSTRUCTION	Single Coated
SELF WOUND	Yes
RELEASE LINER MATERIAL	N/A
RELEASE LINER THICKNESS	
WEIGHT	

TECHNICAL DATA


ADHESIVE LAYER	Rubber
BACKING/CARRIER MATERIAL	Vinyl
BACKING/ADHESIVE THICKNESS	
TOTAL THICKNESS	6.5 mils ASTM D-1000
ADHESION TO STEEL	11.3 oz/in ASTM D-1000
TENSILE STRENGTH	14.3 lbs/in width ASTM D-1000
ELONGATION	200% max at break ASTM D-1000
TEMPERATURE APPLICATION	Under 140°F
TEMPERATURE OPERATING	Under 140°F

Physical and performance characteristics shown are obtained from tests recommended by vendor. Quality Assurance and Technical Service Departments do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

Surfaces to be bonded to should be dry, clean and free from oil and grease.

Typical shelf life is one (1) year from date of manufacture (DOM). Recommended storage conditions: 40-60% Humidity, 60°F to 80°F

Note: The information listed above has been obtained from controlled laboratory tests and is reliable, but should not be used for the purpose of writing specifications. It is offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. It is recommended that the prospective user determine the product suitability before adapting for commercial use.

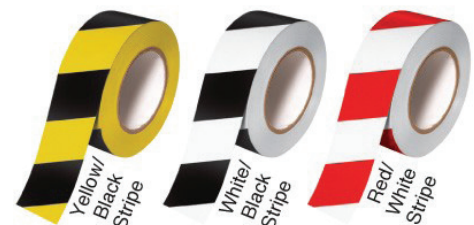

195 Polk Avenue • Nashville, Tennessee 37210
 p: 615.255.1775 • f: 615.256.6557 • 800.643.5996
can-dotape.com