

DESCRIPTION

Multi-Purpose Double-Coated Duct Tape. Cream color with Blue Film Liner. Woven cloth coated on both sides with a polymer based pressure sensitive adhesive and lined with either a paper liner (silicone release coated on both sides) or a polymeric film. Custom slit to width.

APPLICATION PROCESS

Carpet hold-down for the convention and entertainment industry. General mounting & holding. Hanging, seaming and splicing poly sheeting. Good strength and elongation for easy tear, application and removal. Conformable and moisture resistant. Clean removal for most surfaces. High tack and aggressive adhesion for a secure bond. Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED. Low VOC content.

MATERIAL DESCRIPTION	
SIZE (width x length)	25 yd
COLOR	Beige
ADHESIVE TYPE	Pressure-Sensitive Tape
CONSTRUCTION	Double Sided
SELF WOUND	No
RELEASE LINER MATERIAL	Blue LDPE Film, White Kraft Paper
RELEASE LINER THICKNESS	
WEIGHT	
VOC Content	<1 G/L


TECHNICAL DATA	
ADHESIVE LAYER	Rubber
BACKING/CARRIER MATERIAL	Cloth
BACKING/ADHESIVE THICKNESS	N/A
TOTAL THICKNESS	11 mils ASTM D-1000
ADHESION TO STEEL	40 oz/in PSTC-101
TENSILE STRENGTH	20 lbs/in width ASTM D-1000
ELONGATION	
TEMPERATURE APPLICATION	
TEMPERATURE OPERATING	40°F to 200°F

Physical and performance characteristics shown are obtained from tests recommended by vendor. Quality Assurance and Technical Service Departments do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

Surfaces to be bonded to should be dry, clean and free from oil and grease.

Typical shelf life is one (1) year from date of manufacture (DOM). Recommended storage conditions: 40-60% Humidity, 60°F to 80°F

Note: The information listed above has been obtained from controlled laboratory tests and is reliable, but should not be used for the purpose of writing specifications. It is offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. It is recommended that the prospective user determine the product suitability before adapting for commercial use.

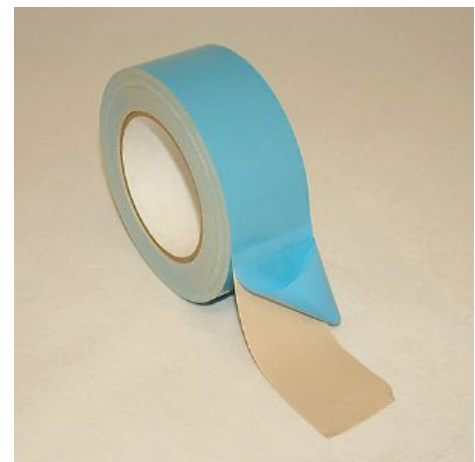

195 Polk Avenue • Nashville, Tennessee 37210
 p: 615.255.1775 • f: 615.256.6557 • 800.643.5996
can-dotape.com