

DESCRIPTION

Blue Painter's Masking Tape. Environmentally safe, water-based acrylic tape that removes cleanly for up to 21 days, leaving clean, crisp painted lines. A high performance masking tape that does not dry out or lose its holding power. In addition to its high performance, we offer competitive pricing which provides a higher margin. 5.6 mil.

APPLICATION PROCESS

Use the Blue Painter's Masking Tape on walls, trim, glass, woodwork and a variety of other surfaces. Other uses for the blue painter's tape are in the flooring industry, because the blue painter's tape is clean release, you can use it to mask hardwood floors, hold polyethylene film down, cardboard and make floor markings.

MATERIAL DESCRIPTION	
SIZE (width x length)	1" X 60 yd
COLOR	Blue
ADHESIVE TYPE	Pressure-Sensitive Tape
CONSTRUCTION	Single Coated
SELF WOUND	Yes
RELEASE LINER MATERIAL	N/A
RELEASE LINER THICKNESS	N/A
WEIGHT	


TECHNICAL DATA	
ADHESIVE LAYER	Acrylic
BACKING/CARRIER MATERIAL	Crepe Paper
BACKING/ADHESIVE THICKNESS	N/A
TOTAL THICKNESS	5.6 mil
ADHESION TO STEEL	15 oz/in
TENSILE STRENGTH	N/A
ELONGATION	N/A
TEMPERATURE APPLICATION	N/A
TEMPERATURE OPERATING	N

Physical and performance characteristics shown are obtained from tests recommended by vendor. Quality Assurance and Technical Service Departments do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

Surfaces to be bonded to should be dry, clean and free from oil and grease.

Typical shelf life is one (1) year from date of manufacture (DOM). Recommended storage conditions: 40-60% Humidity, 60°F to 80°F

Note: The information listed above has been obtained from controlled laboratory tests and is reliable, but should not be used for the purpose of writing specifications. It is offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. It is recommended that the prospective user determine the product suitability before adapting for commercial use.

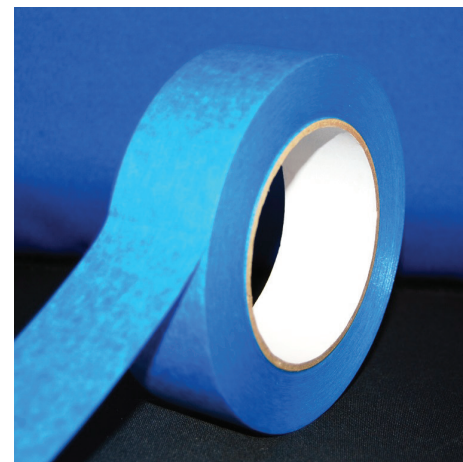

195 Polk Avenue • Nashville, Tennessee 37210
 p: 615.255.1775 • f: 615.256.6557 • 800.643.5996
can-dotape.com